



UK DISTRIBUTORS OF
REINHARDT-TECHNIK
Metering & Mixing
Dispensing Systems

Bonham Drive, Eurolink Industrial Estate
Sittingbourne, Kent. ME10 3RY
Tel 01795 427888 Fax 01795 479685
Email sales@eurobond-adhesives.co.uk
Web www.eurobond-adhesives.co.uk

EB397 - Technical data sheet


Product description

- Double sided polyester tape
- Colour: Clear

Construction

- Yellow Glassline Paper 90g/m²
- Solvent acrylic adhesive

Technical Data

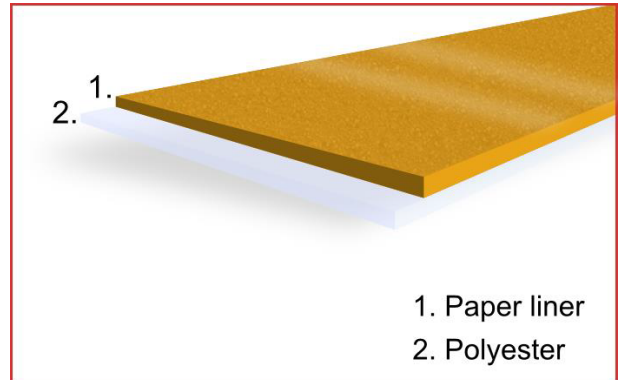

Item	Unit		Spec		Test method
Carrier Thickness	µm	in	12	.00047	-
Overall Thickness	µm	In	275	.011	-
Adhesive (solvent acrylic)	gsm	Oz/yd ²	100	2.9	-
Adhesive power	N/25mm	N/in	24N after 1 min 30N after 20 min 40N after 24 hrs		FINAT TM-1 (Stainless steel)
Shear Strength	h	-	≥400	-	FINAT TM-8 (Stainless steel @ 23°C/73°F)
Holding power for temperature resistance 60°C	h	-	>24	-	PSTC-7 (25x25mm, 0.5kg/1.1lbs)
Initial Tack A/B side	cm	In	<5	<2	PSTC-6 (#14 BALL)
Temperature resistance	°C	°F	-30~+90	-22~+194	-

Remarks

1. Testing conditions: Lab temperature 23±5°C; Lab humidity 55%±10% RH.
2. To be stored under constant temperature of 10~20°C; avoid exposing to high humidity.
3. Under normal condition, it can be stored for one year.

Note:

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Eurobond Adhesives Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

21.07.16

No liability is accepted for any injury, loss or damage arising directly or indirectly from the use of the Company's products or from the use of information given in our publications, which is intended to serve as a guide only. Customers should satisfy themselves by appropriate trials that the products are suitable for their intended use.

