



UK DISTRIBUTORS OF
REINHARDT-TECHNIK
 Metering & Mixing
 Dispensing Systems

Bonham Drive, Eurolink Industrial Estate
 Sittingbourne, Kent. ME10 3RY
 Tel 01795 427888 Fax 01795 479685
 Email sales@eurobond-adhesives.co.uk
 Web www.eurobond-adhesives.co.uk


EB4525C – TECHNICAL DATA SHEET

Product description

- Foamed Acrylic Tape
- Colour: Transparent

Construction

- Red Siliconized Liner
- Acrylic adhesive

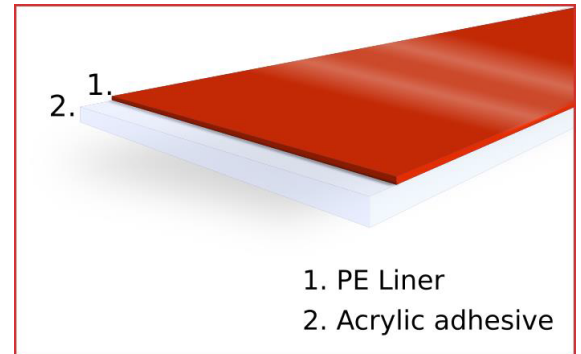

Technical Data

Item	Unit		Spec		Test Method
	mm	inch			
Total Thickness	mm	inch	0.25 (±0.05)	.010	-
Density	kg/m ³	lb/ft ³	1000	62	-
180° Peel Strength	gf/25mm	lb/in	3000	6.61	ASTM-D-3330
Tensile Strength (T-Block Test)	g/cm ²	lb/in ²	7000	99.56	ASTM-D-897
Dynamic Shear (after 20mins, stainless steel)	g/cm ²	lb/in ²	4000	56.89	ASTM D-1002
Dynamic Shear (after 24hrs Stainless steel)	g/cm ²	lb/in ²	5500	78.23	ASTM D-1002
Temperature Resistance (Short Term)	°C	°F	160	320	-
Temperature Resistance (Long Term)	°C	°F	100	212	-
LowTemp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Eurobond Adhesives Ltd will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

09.08.16

No liability is accepted for any injury, loss or damage arising directly or indirectly from the use of the Company's products or from the use of information given in our publications, which is intended to serve as a guide only. Customers should satisfy themselves by appropriate trials that the products are suitable for their intended use.

