



UK DISTRIBUTORS OF  
**REINHARDT-TECHNIK**  
 Metering & Mixing  
 Dispensing Systems



Bonham Drive, Eurolink Industrial Estate  
 Sittingbourne, Kent. ME10 3RY  
 Tel 01795 427888 Fax 01795 479685  
 Email [sales@eurobond-adhesives.co.uk](mailto:sales@eurobond-adhesives.co.uk)  
 Web [www.eurobond-adhesives.co.uk](http://www.eurobond-adhesives.co.uk)


EB140B MultiSeal® PRO – Sealing Tape Technical data sheet

**Product description**

- Double sided nano-cell polyurethane foam.
- High quality UV cured acrylic pressure sensitive cross-linked adhesive.
- Excellent all round performance in the most demanding of applications.

**Construction**

- PET liner (75µ)
- Acrylic adhesive (80µ)
- Black film (50µ)
- Nano-cell PU foam (1190µ)
- Acrylic adhesive (80µ)

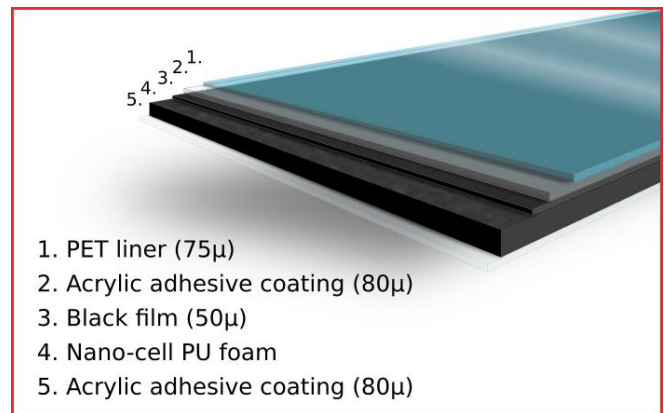

**Technical data**

Item	Unit		Spec		Test Method
<b>Foam Thickness</b>	µm	In	1190	.0469	ASTM D3574
<b>Total Thickness</b>	µm	In	1400	.0551	ASTM D3574
<b>Foam Density</b>	kg/m <sup>3</sup>	lb/ft <sup>3</sup>	250 ± 50	15.607	ASTM D3574
<b>Compression Set</b> (@ 70°C & 22hrs)	%	-	50	-	ASTM D3574
<b>Max Strain</b>	%	-	61.7	-	ASTM D3574
<b>Hardness</b>	Shore C	-	45	-	ASTM D3574
<b>Temperature Resistance</b> (Short Term)	°C	°F	121	250	-
<b>Tempertaure Resistance</b> (Long Term)	°C	°F	93	199	-

**Application**

Cushioning, gaskets, sealing, shock absorbency, anti-rattle applications.

**Note:**

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Eurobond Adhesives Ltd will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

