



UK DISTRIBUTORS OF
REINHARDT-TECHNIK
 Metering & Mixing
 Dispensing Systems

Bonham Drive, Eurolink Industrial Estate
 Sittingbourne, Kent. ME10 3RY
 Tel 01795 427888 Fax 01795 479685
 Email sales@eurobond-adhesives.co.uk
 Web www.eurobond-adhesives.co.uk


EB3120G - Technical data sheet

Product description

- Foamed Acrylic Tape
- Colour: Grey
- Low temperature resistance

Construction

- Red PE Liner
- Acrylic adhesive

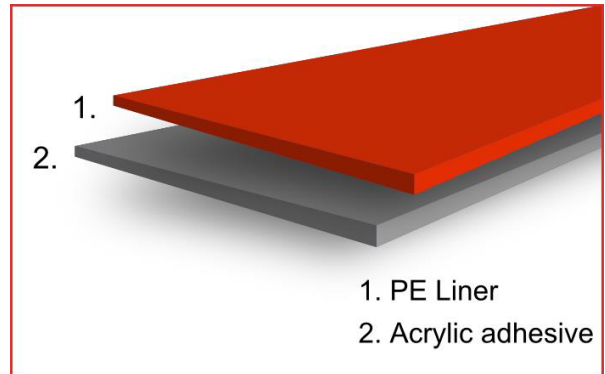

Technical data

| Item | Unit | | Spec | | Test Method |
|--------------------------------------|--------------------|--------------------|-----------|---------------|-------------|
| | mm | Inch | | | |
| Total thickness | mm | Inch | 1.1(±0.1) | .043 (± .004) | - |
| Density | kg/m ³ | lb/ft ³ | 780 | 49 | - |
| 180° Peel Strength | g/25mm | lb/in | 6600 | 14.8 | ASTM-D-3330 |
| Tensile Strength (T-Block Test) | gf/cm ² | lb/in ² | 8500 | 121 | ASTM-D-897 |
| Dynamic Shear (after 24h) | g/cm ² | lb/in ² | 7200 | 102 | ASTM-D-1002 |
| Temperature Resistance Short term | °C | °F | 160 | 320 | - |
| Temperature Resistance Long term | °C | °F | 100 | 212 | - |
| Low Temp. Resistance | °C | °F | -40 | -40 | - |
| UV Resistance | - | - | Good | - | - |

Application

1. Low temperature application
2. External application
3. Sign industry
4. Panel bonding (window industry)

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Eurobond Adhesives Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

